

XTRU-RAIL

Linear Series | ARCHITECTURAL LIGHTING





Impact Lighting's **XTRU-RAIL** extrusion is the answer for illuminating handrails. Designed for assembly in steel, stainless steel or aluminum pipe handrails and balustrades.

This high quality profile offers an unique way to make use of linear low voltage lighting and is the designer's choice for commercial and residential handrail lighting

Please note: These profiles are only compatible with strip light 0.4 inches wide or smaller. They are compatible with ThinGlow LED Strip Light.

XTRU-RAIL
Linear Series
Aluminum LED lighted profile.

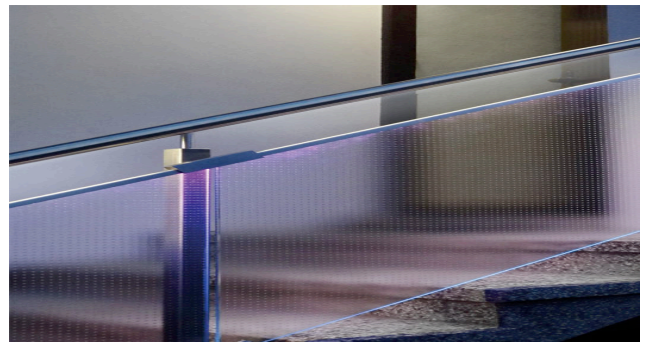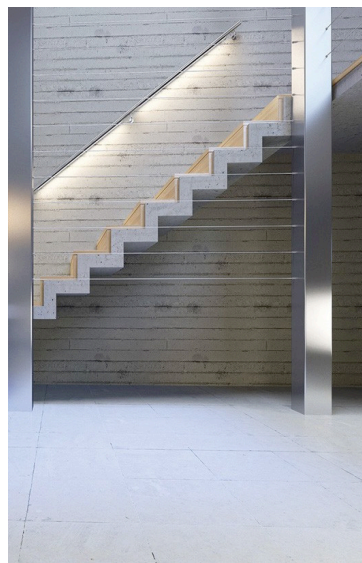

KEY FEATURES:

- ▶ Fits a wide variety of pipe handrail diameters
- ▶ Embedded backlighting illuminates stairs
- ▶ Easy assembly and disassembly
- ▶ IP67 waterproof rated

X-LUME

A DIVISION OF IMPACT LIGHTING INC.

3100 Pennington Road. Orlando, Florida 32804 USA • Phone: 1.800.507.5714 • Fax: 407.745.4584 • Email: sales@impactlightinginc.com

www.xlumeled.com

PROJECT	DATE
TYPE	QTY.

XTRU-RAIL


ARCHITECTURAL LINEAR SERIES



XTRU-RAIL



XTRU-RAIL COVER
(available in 3 types)

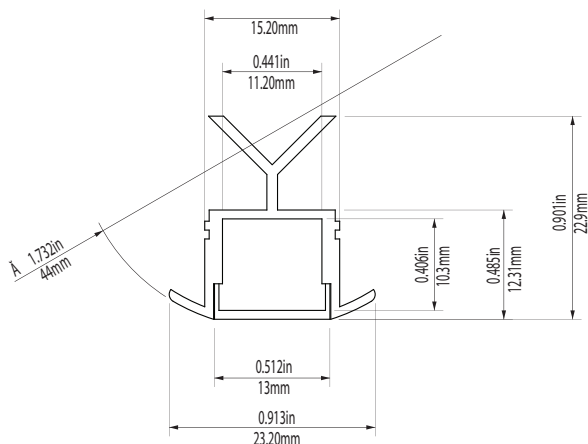

OUTPUT	LUMENS @ 3000K*	WATTS PER FOOT
LOW	112 Lm/f	1.5 W/f
MEDIUM	265 Lm/f	3 W/f
HIGH	375 Lm/f	4.5 W/f
RGB	RGB Lm/f	4.5 W/f

XTRU-RAIL LED Profile is designed for lighting assembly in steel, stainless steel or aluminum pipe handrails and balustrades.


This high quality profile offers a unique way to make use of linear low voltage lighting and is the designer's choice for commercial and residential handrail lighting

Please note: These profiles are only compatible with strip light 0.4 inches wide or smaller. They are compatible with ThinGlow LED Strip Light.

FEATURES

- Two different mounting inserts allow installation in diameters from 41 mm to 48 mm (1.65" to 1.92")
- IP67 rating available*
- max. length = 104.8 cm (41.29")
- max. Watt/ft = 15W/m (4.6W/F)

*IP67 relies on proper sealing and install.

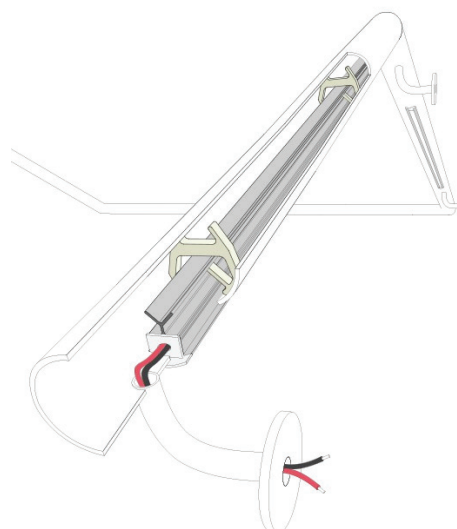

V. 1119 | Copyright © 2019, ImpactLighting Inc. All Rights Reserved

ORDERING

Example:

XTRU-RAIL- 12"- A - F - 30 - M - 72 - S

XTRU-RAIL Profile, 12" Cut Length, Anodized Aluminum Finish, Frosted Cover w/ 3000K LED, Medium Output, 72" Wire Length, Standard Insert

MODEL	CUT LENGTH	HOUSING FINISH	COVER	LED COLOR	LED OUTPUT	LEAD WIRE LENGTH	MOUNTING
XTRU-RAIL							
Aluminum LED Lighted Profile	Write desired length above (up to 41")	A - Anodized	F - Frosted F - Clear M - Milky (no led dots visible)	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K RGB - Red, Green, Blue	L - Low Output M - Medium Output H - High Output X - RGB	36 - 36" 72 - 72" 36F - 36" w/ female connector 72F - 72" w/ female connector 36M - 36" w/ male connector 72M - 72" w/ male connector	S - Standard Size Insert P - Plus Size Insert

X-LUME

A DIVISION OF IMPACT LIGHTING INC.

3100 Pennington Road. Orlando, Florida 32804 USA • Phone: 1.800.507.5714 • Email: sales@impactlightinginc.com

www.xlumeled.com