

PROJECT	DATE
TYPE	QTY.

XTRU-RAIL

XTRU-RAIL

ARCHITECTURAL LINEAR SERIES

XTRU-RAIL LED Profile is designed for lighting assembly in steel, stainless steel or aluminum pipe handrails and balustrades.


This high quality profile offers a unique way to make use of linear low voltage lighting and is the designer's choice for commercial and residential handrail lighting


Please note: These profiles are only compatible with strip light 0.4 inches wide or smaller. They are compatible with ThinGlow LED Strip Light.

FEATURES

- Two different mounting inserts allow installation in diameters from 41 mm to 48 mm (1.65" to 1.92")
- IP67 rating available*
- max. length = 104.8 cm (41.29")
- max. Watt/ft = 15W/m (4.6W/F)

*IP67 relies on proper sealing and install.






OUTPUT	LUMENS @ 3000K*	WATTS PER FOOT
LOW	112 Lm/f	1.5 W/f
MEDIUM	265 Lm/f	3 W/f
HIGH	375 Lm/f	4.5 W/f
RGB	RGB Lm/f	4.5 W/f

Example: ORDERING XTRU-RAIL- 12"- A - F - 30 - M - 72 - S

XTRU- RAIL Profile, 12" Cut Length, Anodized Aluminum Finish, Frosted Cover w/ 3000K LED, Medium Output, 72" Wire Length, Standard Insert

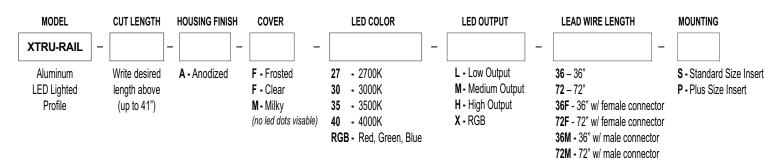

X-LUME A DIVISION OF IMPACT LIGHTING INC.

3100 Pennington Road. Orlando, Florida 32804 USA • Phone: 1.800.507.5714 • Email: sales@impactlightinginc.com

www.xlumeled.com